

Hauptkatalog Halogen Scheinwerfer 2014 inkl. Preisliste 2014

**KFZ Service Fenzl
KSR Vertragshändler
Inh. Stephan Fenzl
Im Dorf 18a
94051 Hauzenberg
Deutschland**


www.kfz-service-fenzl.de

Email: info@kfz-service-fenzl.de

Tel.: 0151/ 55949309

| Model | Picture | Specifications | |
|---|---------|---------------------|--------------------------------|
|  | | Model No | LW-HDL-0150 |
| | | Internal ballast | |
| | | HID bulb | H3 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V/9-36V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | Optional Color | Black,Grey |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Opitonal Beam | Striped spot |
| | | Size | 4 inch 182mm*137mm*190mm |
| | | material | ABS |

| Model | Picture | Specifications | |
|-------|---------|----------------|--|
|-------|---------|----------------|--|

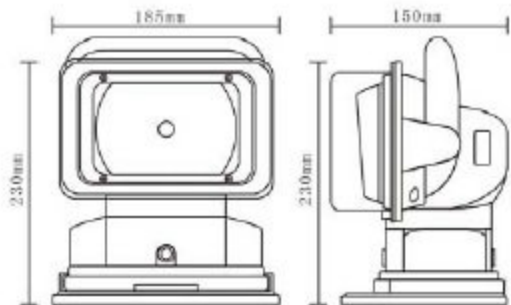
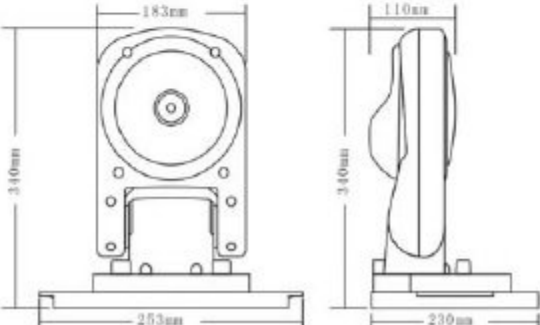



| Model No | LW-HDL-2009 |
|---------------------|--------------------------------|
| Internal ballast | |
| HID bulb | H3 |
| HID Power | 35W/55W |
| Operating Voltage | 12V/24V |
| Luminous | 3200Lum/4000LM (±400lum) |
| Waterproof rate | IP67 |
| Working Temperature | -40℃~+80℃ |
| Vibration | 20Grms 24-2000Hz |
| Optional Color | Black |
| Color Temperature | 6000K. (4300k-12000k optional) |
| Material | Plastic |
| Opitonal Beam | Spot/Flood Beam |
| Size | 150mm*185mm*230mm |




| Model | Picture | Specifications | |
|-------|---------|----------------|--|
|-------|---------|----------------|--|




| Model No | LW-HDL-2019 |
|---------------------|---|
| Housing | Hi-impact nylon Plastic,toughened |
| | Internal ballast |
| Beam | spot beam |
| HID Bulb | H1 |
| Operating Voltage | 12V/24V |
| Working temperature | -45 ~85°C |
| Color temperature | 6000K(4300K~8000K) |
| | Wireless Remote 360 deg Left/right, 120 deg Up/down |
| Power | 35W 3200±400lm/55W 4300±400lm |
| Optional color | black,white |

| Model | Picture | Specifications | |
|---|---|----------------------------|--------------------------------|
| | | Ctn Size | 530*300*510 mm |
|  | | Model No | LW-HDL-2020 |
| | | Internal ballast | |
| | | HID bulb | H3 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | Optional Color | Black |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Opitonal Beam | Spot Beam |
| | | Size | 150mm*185mm*230mm |
| |  | material | ABS |



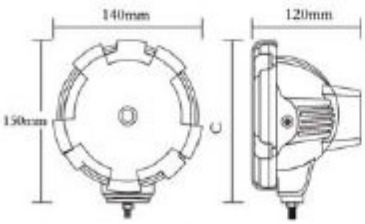


| Model | Picture | Specifications | |
|---|--|---|--|
|  | <p style="text-align: center;">Model No</p> | <p style="text-align: center;">LW-HDL-3400</p> | |
| | | <p>Internal ballast</p> | |
| | <p>HID bulb</p> | <p>H3</p> | |
| | <p>HID Power</p> | <p>35W/55W</p> | |
| | <p>Operating Voltage</p> | <p>12V/24V/9-36V</p> | |
| | <p>Luminous</p> | <p>3200Lum/4000LM (±400lum)</p> | |
| | <p>Waterproof rate</p> | <p>IP67</p> | |
| | <p>Working Temperature</p> | <p>-40℃~+80℃</p> | |
| | <p>Vibration</p> | <p>20Grms 24-2000Hz</p> | |
| | <p>Optional Color</p> | <p>Black、 Red</p> | |
| | <p>Color Temperature</p> | <p>6000K. (4300k-12000k optional)</p> | |
| | <p>Material</p> | <p>Plastic</p> | |
| | <p>Opitonal Beam</p> | <p>Smooth /Striped spot, Striped flood</p> | |
| <p>Size</p> | <p>4 inch 130mm*140mm*150mm</p> | | |
| <p>material</p> | <p>ABS</p> | | |


| Model | Picture | Specifications | |
|--|---------------------------------|--|--|
|    | Model No | LW-HDL-3410 | |
| | Internal ballast | | |
| | HID bulb | H3 | |
| | HID Power | 35W/55W | |
| | Operating Voltage | 12V/24V/9-36V | |
| | Luminous | 3200Lum/4000LM (±400lum) | |
| | Waterproof rate | IP67 | |
| | Working Temperature | -40℃ ~+80℃ | |
| | Vibration | 20Grms 24-2000Hz | |
| | Optional Color | Black、 Red | |
| | Color Temperature | 6000K. (4300k-12000k optional) | |
| | Material | Plastic | |
| | Opitonal Beam | Smooth /Striped spot, Striped flood | |
| Size | 4 inch 130mm*140mm*150mm | | |
| material | ABS | | |


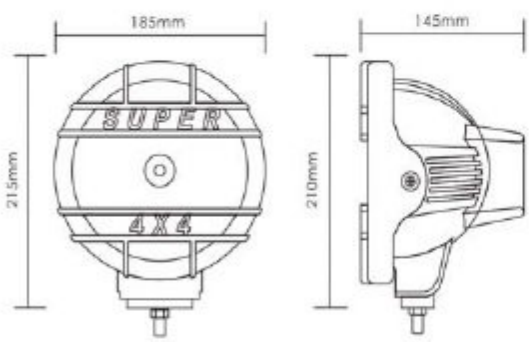
| Model | Picture | Specifications | |
|-------|--|---------------------|--------------------------------|
| |  | Model No | LW-HDL-3611 |
| | | Internal ballast | |
| | | HID bulb | H3 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V/9-36V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | Optional Color | Black |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Optonal Beam | Smooth spot |
| | | Size | 6 inch 85mm*158mm*165mm |
| | | material | aluminium |


| Model | Picture | Specifications | |
|---|---|----------------------------|---------------------------------------|
|  |  | Model No | LW-HDL-3622 |
| | | Internal ballast | |
| | | HID bulb | H3 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V/9-36V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃ ~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | Optional Color | Black |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Opitonal Beam | Smooth spot |
| | | Size | 6 inch 105mm*160mm*165mm |
| material | ABS | | |

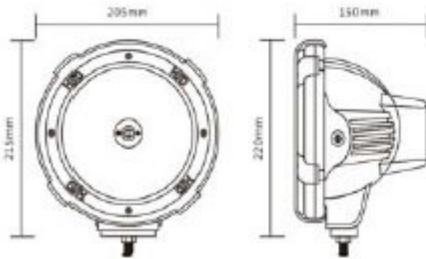


| Model | Picture | Specifications | |
|---|--|---------------------|--------------------------------|
|  |  | Model No | LW-HDL-3633 |
| | | Internal ballast | |
| | | HID bulb | H3 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V/9-36V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | Optional Color | Black |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Opitonal Beam | Spot/Flood Beam |
| | | Size | 6 inch 150mm*205mm*220mm |
| material | aluminium | | |


| Model | Picture | Specifications | |
|--|--|-------------------------------------|--------------------------------|
|    |   | Model No | LW-HDL-3700 |
| | Internal ballast | | |
| | HID bulb | | H3 |
| | HID Power | | 35W/55W |
| | Operating Voltage | | 12V/24V/9-36V |
| | Luminous | | 3200Lum/4000LM (±400lum) |
| | Waterproof rate | | IP67 |
| | Working Temperature | | -40℃~+80℃ |
| | Vibration | | 20Grms 24-2000Hz |
| | Optional Color | | Black, Red |
| | Color Temperature | | 6000K. (4300k-12000k optional) |
| | Material | | Plastic |
| Opitonal Beam | | Smooth /Striped spot, Striped flood | |
| Size | | 7 inch 150mm*205mm*220mm | |
| material | | ABS | |


| Model | Picture | Specifications | |
|---|---------------------|-------------------------------------|--------------------------------|
|  | | Model No | LW-HDL-3710 |
| | Internal ballast | | |
| | HID bulb | | H3 |
| | HID Power | | 35W/55W |
| | Operating Voltage | | 12V/24V/9-36V |
| | Luminous | | 3200Lum/4000LM (±400lum) |
| | Waterproof rate | | IP67 |
| | Working Temperature | | -40℃ ~+80℃ |
| | Vibration | | 20Grms 24-2000Hz |
| | Optional Color | | Black, Red |
| | Color Temperature | | 6000K. (4300k-12000k optional) |
| Material | | Plastic | |
| Opitonal Beam | | Smooth /Striped spot, Striped flood | |
| Size | | 7 inch 150mm*205mm*220mm | |
| material | | ABS | |


| Model | Picture | Specifications | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
|---|--|--------------------------------|-------------|------------------|--|----------|----|-----------|---------|-------------------|---------------|----------|--------------------------|-----------------|------|---------------------|-----------|-----------|------------------|----------------|-------|-------------------|--------------------------------|----------|---------|---------------|-------------------------------------|------|--------------------------|----------|-----|--|--|
|   | <table border="1"> <thead> <tr> <th data-bbox="238 127 1116 244">Model No</th> <th data-bbox="1116 127 1568 244">LW-HDL-3733</th> </tr> </thead> <tbody> <tr> <td data-bbox="238 244 1116 303">Internal ballast</td> <td data-bbox="1116 244 1568 303"></td> </tr> <tr> <td data-bbox="238 303 1116 362">HID bulb</td> <td data-bbox="1116 303 1568 362">H3</td> </tr> <tr> <td data-bbox="238 362 1116 421">HID Power</td> <td data-bbox="1116 362 1568 421">35W/55W</td> </tr> <tr> <td data-bbox="238 421 1116 479">Operating Voltage</td> <td data-bbox="1116 421 1568 479">12V/24V/9-36V</td> </tr> <tr> <td data-bbox="238 479 1116 538">Luminous</td> <td data-bbox="1116 479 1568 538">3200Lum/4000LM (±400lum)</td> </tr> <tr> <td data-bbox="238 538 1116 597">Waterproof rate</td> <td data-bbox="1116 538 1568 597">IP67</td> </tr> <tr> <td data-bbox="238 597 1116 656">Working Temperature</td> <td data-bbox="1116 597 1568 656">-40℃~+80℃</td> </tr> <tr> <td data-bbox="238 656 1116 715">Vibration</td> <td data-bbox="1116 656 1568 715">20Grms 24-2000Hz</td> </tr> <tr> <td data-bbox="238 715 1116 773">Optional Color</td> <td data-bbox="1116 715 1568 773">Black</td> </tr> <tr> <td data-bbox="238 773 1116 832">Color Temperature</td> <td data-bbox="1116 773 1568 832">6000K. (4300k-12000k optional)</td> </tr> <tr> <td data-bbox="238 832 1116 891">Material</td> <td data-bbox="1116 832 1568 891">Plastic</td> </tr> <tr> <td data-bbox="238 891 1116 950">Opitonal Beam</td> <td data-bbox="1116 891 1568 950">Smooth /Striped spot, Striped flood</td> </tr> <tr> <td data-bbox="238 950 1116 1009">Size</td> <td data-bbox="1116 950 1568 1009">7 inch 150mm*205mm*220mm</td> </tr> <tr> <td data-bbox="238 1009 1116 1058">material</td> <td data-bbox="1116 1009 1568 1058">ABS</td> </tr> </tbody> </table> | Model No | LW-HDL-3733 | Internal ballast | | HID bulb | H3 | HID Power | 35W/55W | Operating Voltage | 12V/24V/9-36V | Luminous | 3200Lum/4000LM (±400lum) | Waterproof rate | IP67 | Working Temperature | -40℃~+80℃ | Vibration | 20Grms 24-2000Hz | Optional Color | Black | Color Temperature | 6000K. (4300k-12000k optional) | Material | Plastic | Opitonal Beam | Smooth /Striped spot, Striped flood | Size | 7 inch 150mm*205mm*220mm | material | ABS | | |
| | Model No | LW-HDL-3733 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Internal ballast | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | HID bulb | H3 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | HID Power | 35W/55W | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Operating Voltage | 12V/24V/9-36V | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Luminous | 3200Lum/4000LM (±400lum) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Waterproof rate | IP67 | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Working Temperature | -40℃~+80℃ | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Vibration | 20Grms 24-2000Hz | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Optional Color | Black | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Color Temperature | 6000K. (4300k-12000k optional) | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | Material | Plastic | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Opitonal Beam | Smooth /Striped spot, Striped flood | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| Size | 7 inch 150mm*205mm*220mm | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| material | ABS | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |
| | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | | |


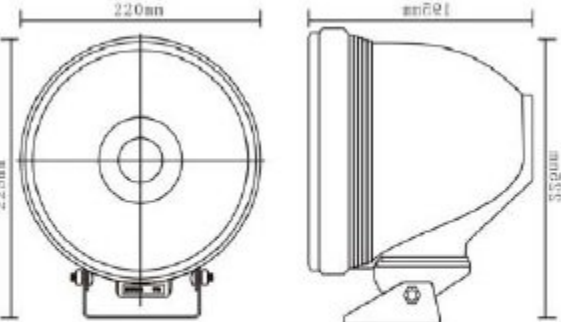
| Model | Picture | Specifications | |
|---|----------|--------------------------|--------------------------------|
|  | | Model No | LW-HDL-3750 |
| | | Internal ballast | |
| | | HID bulb | H3 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V/9-36V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃ ~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | Optional Color | Black,Grey |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Opitonal Beam | Striped spot, Striped flood |
| | Size | 7 inch 182mm*137mm*190mm | |
| | material | ABS | |


| Model | Picture | Specifications | |
|---|--|--------------------------------|-------------|
|  |   | Model No | LW-HDL-3760 |
| | | Internal ballast | |
| | HID bulb | H3 | |
| | HID Power | 35W/55W | |
| | Operating Voltage | 12V/24V/9-36V | |
| | Luminous | 3200Lum/4000LM (±400lum) | |
| | Waterproof rate | IP67 | |
| | Working Temperature | -40℃ ~+80℃ | |
| | Vibration | 20Grms 24-2000Hz | |
| | Optional Color | Red | |
| | Color Temperature | 6000K. (4300k-12000k optional) | |
| Material | Plastic | | |
| Opitonal Beam | Smooth spot, Striped flood | | |
| Size | 7 inch 180mm*144mm*188mm | | |
| material | ABS | | |


| Model | Picture | Specifications | |
|---|---------------------|--------------------------|--------------------------------|
|  | | Model No | LW-HDL-3800 |
| | Internal ballast | | |
| | HID bulb: | | 9005 |
| | HID Power | | 35W/55W |
| | Operating Voltage | | 12V/24V/9-36V |
| | Luminous | | 3200Lum/4000LM (±400lum) |
| | Waterproof rate | | IP67 |
| | Working Temperature | | -40℃~+80℃ |
| | Vibration | | 20Grms 24-2000Hz |
| | Optional Color | | Black |
| | Color Temperature | | 6000K. (4300k-12000k optional) |
| | Material | | Plastic |
| | Opitonal Beam | | Smooth spot, Striped flood |
| Size | | 8 inch 218mm*151mm*235mm | |
| material | | ABS | |

| Model | Picture | Specifications | |
|--|----------------------------|--------------------------------|-------------|
|  | | Model No | LW-HDL-3900 |
| | HID bulb | H3 | |
| | HID Power | 35W/55W | |
| | Operating Voltage | 12V/24V/9-36V | |
| | Luminous | 3200Lum/4000LM (±400lum) | |
| | Waterproof rate | IP67 | |
| | Working Temperature | -40℃ ~+80℃ | |
| | Vibration | 20Grms 24-2000Hz | |
| | Optional Color: | Black, Red | |
| | Color Temperature | 6000K. (4300k-12000k optional) | |
| Material | Plastic | | |
| Opitonal Beam | Smooth spot, Striped flood | | |
| Size | 9 inch 180mm*250mm*270mm | | |
| material | ABS | | |

| Model | Picture | Specifications | |
|---|---------------------|--------------------------|--------------------------------|
|  | | Model No | LW-HDL-3910 |
| | Internal ballast | | |
| | HID bulb | | H3 |
| | HID Power | | 35W/55W |
| | Operating Voltage | | 12V/24V/9-36V |
| | Luminous | | 3200Lum/4000LM (±400lum) |
| | Waterproof rate | | IP67 |
| | Working Temperature | | -40℃ ~+80℃ |
| | Vibration | | 20Grms 24-2000Hz |
| | Optional Color | | Black, Red |
| | Color Temperature | | 6000K. (4300k-12000k optional) |
| | Material | | Plastic |
| | Opitonal Beam | | Smooth spot, Striped flood |
| Size | | 9 inch 180mm*250mm*270mm | |
| material | | ABS | |

| Model | Picture | Specifications | |
|---|---|----------------------------|---------------------------------------|
|  |  | Model No | LW-HDL-4500 |
| | | Internal ballast | |
| | | HID bulb | H1 |
| | | HID Power | 35W/55W |
| | | Operating Voltage | 12V/24V/9-32V |
| | | Luminous | 3200Lum/4000LM (±400lum) |
| | | Waterproof rate | IP67 |
| | | Working Temperature | -40℃~+80℃ |
| | | Vibration | 20Grms 24-2000Hz |
| | | | |
| | | Color Temperature | 6000K. (4300k-12000k optional) |
| | | Material | Plastic |
| | | Opitonal Beam | Spot/Flood Beam |
| | | Size | 9 inch 195mm*220mm*225mm |
| | | material | ABS |

| Model | Picture | Specifications | |
|---|---------------------|----------------|-------------------------------|
|  | | Model No | LW-HDL-4701 |
| | Housing | | ABS Plastic |
| | Lens | | PC |
| | | | External ballast |
| | Beam | | spot |
| | Operating Voltage | | 12V/9-32V |
| | HID xenon bulb | | H3 |
| | Color | | black |
| | Color temperature | | 6000K(4300K~8000K optional) |
| | Working temperature | | -10~60°C |
| | Lifespan | | 3000 Hours |
| | Power | | 35W 3200±400lm/55W 4300±400lm |


| Model | Picture | Specifications | |
|---|---------|----------------------------|--------------------------------------|
|  | | Model No | LW-HDL-4702 |
| | | Housing | ABS plastic |
| | | Lens | PMMA |
| | | | Internal slim ballast |
| | | Beam | Spot beam |
| | | Operating Voltage | 12V/9-32V |
| | | HID bulb | H3 |
| | | Color | Black |
| | | Color temperature | 6000K(4300K~8000K optional) |
| | | Working temperature | -10~60°C |
| | | Lifespan | 3000 Hours |
| | | Power | 35W 3200±400lm/55W 4300±400lm |

| Model | Picture | Specifications | |
|-------|---------|----------------|--|
|-------|---------|----------------|--|



| Model No | LW-HDL-5000 |
|----------|-------------|
|----------|-------------|

| | |
|---------------------|--------------------------------|
| Internal ballast | |
| HID bulb | H1 |
| HID Power | 35W/55W |
| Operating Voltage | 12V/24V/9-32V |
| Luminous | 3200Lum/4000LM (±400lum) |
| Waterproof rate | IP67 |
| Working Temperature | -40℃~+80℃ |
| Vibration | 20Grms 24-2000Hz |
| Optional Color | Black |
| Color Temperature | 6000K. (4300k-12000k optional) |
| Material | Plastic |
| Opitonal Beam | Spot/Flood Beam |
| Size | 9 inch 195mm*220mm*225mm |
| material | ABS |

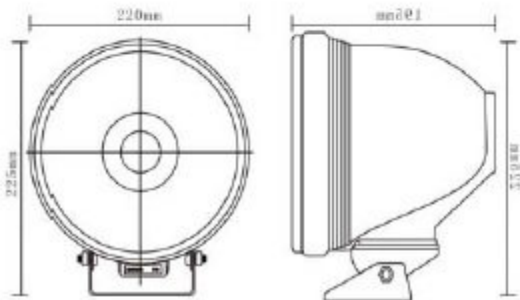

Smooth spot



Striped Spot



Striped flood



KFZ Service Fenzl
Preisliste Halogen Scheinwerfer

| Model | Version | Preis inkl. MwSt |
|--------------------|------------------------|-------------------------|
| | | |
| LW-HDL-3800 | 12V/ 35W | 62 € |
| | 12V/ 55W | 65 € |
| | 9-36V/ 35W | 67 € |
| | 9-36V/ 55W | 71 € |
| | | |
| LW-HDL-3760 | 12V/ 35W | 52 € |
| | 12V/ 55W | 55 € |
| | 9-36V/ 35W | 56 € |
| | 9-36V/ 55W | 61 € |
| | | |
| LW-HDL-4701 | 12V/ 35W | 59 € |
| | 12V/ 55W | 67 € |
| | 9-32V/ 35W | 62 € |
| | 9-32V/ 55W | 70 € |
| | 9-32V/ 75W | 73 € |
| | 9-32V/ 100W | 78 € |
| | | |
| LW-HDL-3750 | 12V/ 35W | 46 € |
| | 12V/ 55W | 49 € |
| | 9-36V/ 35W | 50 € |
| | 9-36V/ 55W | 55 € |
| | | |
| LW-HDL-4702 | 12V/ 35W | 62 € |
| | 12V/ 55W | 70 € |
| | 9-32V/ 35W | 67 € |
| | | |
| LW-HDL-0150 | 12V/ 35W | 46 € |
| | 12V/ 55W | 49 € |
| | 9-36V/ 35W | 50 € |
| | 9-36V/ 55W | 55 € |
| | | |
| LW-HDL-3900 | 12V/ 35W | 55 € |
| | 12V/ 55W | 58 € |
| | 9-36V/ 35W | 61 € |
| | 9-36V/ 55W | 64 € |
| | 12V/ 75W | 95 € |
| | 12V/ 100W | 96 € |

KFZ Service Fenzl
Preisliste Halogen Scheinwerfer

| Model | Version | Preis inkl. Mwst |
|--------------------|-------------------|-----------------------------|
| LW-HDL-3910 | 12V/ 35W | 55 € |
| | 12V/ 55W | 58 € |
| | 9-36V/ 35W | 61 € |
| | 9-36V/ 55W | 64 € |
| | 12V/ 75W | 95 € |
| | 12V/ 100W | 96 € |
| LW-HDL-3700 | 12V/ 35W | 43 € |
| | 12V/ 55W | 46 € |
| | 9-36V/ 35W | 47 € |
| | 9-36V/ 55W | 50 € |
| LW-HDL-3710 | 12V/ 35W | 43 € |
| | 12V/ 55W | 46 € |
| | 9-36V/ 35W | 47 € |
| | 9-36V/ 55W | 50 € |
| LW-HDL-3733 | 12V/ 35W | 43 € |
| | 12V/ 55W | 46 € |
| | 9-36V/ 35W | 46 € |
| | 9-36V/ 55W | 50 € |
| LW-HDL-3400 | 12V/ 35W | 40 € |
| | 12V/ 55W | 43 € |
| | 9-36V/ 35W | 45 € |
| | 9-36V/ 55W | 47 € |
| LW-HDL-3410 | 12V/ 35W | 40 € |
| | 12V/ 55W | 43 € |
| | 9-36V/ 35W | 45 € |
| | 9-36V/ 55W | 47 € |
| LW-HDL-3622 | 12V/ 35W | 43 € |
| | 12V/ 55W | 46 € |
| | 9-36V/ 35W | 47 € |
| | 9-36V/ 55W | 50 € |
| LW-HDL-4500 | 12V/ 35W | 68 € |
| | 12V/ 55W | 73 € |
| | 9-36V/ 35W | 76 € |
| | 9-36V/ 55W | 76 € |

KFZ Service Fenzl
Preisliste Halogen Scheinwerfer

| Model | Version | Preis inkl. Mwst |
|--------------------|-------------------|-----------------------------|
| | | |
| LW-HDL-5000 | 12V/ 35W | 71 € |
| | 12V/ 55W | 76 € |
| | 9-36V/ 35W | 76 € |
| | 9-36V/ 55W | 79 € |
| | | |
| LW-HDL-3633 | 12V/ 35W | 52 € |
| | 12V/ 55W | 55 € |
| | 9-36V/ 35W | 56 € |
| | 9-36V/ 55W | 59 € |
| | | |
| LW-HDL-3611 | 12V/ 35W | 40 € |
| | 12V/ 55W | 45 € |
| | 9-36V/ 35W | 45 € |
| | 9-36V/ 55W | 50 € |
| | | |
| LW-HDL-2019 | 12V/ 35W | 89 € |
| | 12V/ 55W | 89 € |
| | 24V/ 35W | 89 € |
| | 24V/ 55W | 89 € |
| | | |
| LW-HDL-2009 | 12V/ 35W | 80 € |
| | 12V/ 55W | 83 € |
| | 24V/ 35W | 85 € |
| | 24V/ 55W | 88 € |
| | | |
| LW-HDL-2020 | 12V/ 35W | 114 € |
| | 12V/ 55W | 117 € |
| | 24V/ 35W | 119 € |
| | 24V/ 55W | 122 € |